



## Verkaufspreisliste 2019 gültig ab 5. Juni 2019

Info: ↓ = Preissenkung, ↑ = Preiserhöhung, ✓ = keine Veränderung

ARTIKEL

BEZEICHNUNG

VP (CHF) Info

### MULTISPEAKER SYSTEMS

Up until now, the ability to connect multiple speakers in parallel was confronted by the issue of operating the amplifier at a safe nominal wattage. Although there are amplifiers that operate at 4 ohms and 2 ohms safely, any effort to drive it below the rated resistance led to device failures. With this revolutionary invention, the rules have changed!

ZERO-OHM System is a passive device that interconnects between any amplifier and multiple loudspeakers without the concerns of amplifier speaker loads, impedance and extremely long cable runs.




#### FEATURES:

- ✓ Zero (0) Ohm functionality
- ✓ No Transformers required
- ✓ Multiple loudspeakers can be connected in parallel
- ✓ Any Speaker impedance can be used: 2/4/8/16 Ohm
- ✓ Uniform power distribution over long distance cable runs
- ✓ Full range frequency response
- ✓ Identical Output Phase relationship with all Power Amplifiers

### Zero-Ohm Systems

MS-4R	ZERO OHM Multispeaker Unit • max. 4'000 Watt per Channel • 2 x 20 Speaker in parallel	1'790.00	neu!
MS-2R	ZERO OHM Multispeaker Unit • max. 2'000 Watt per Channel • 2 x 20 Speaker in parallel	1'390.00	neu!

#### Back Panel SpeakON™ Connectors

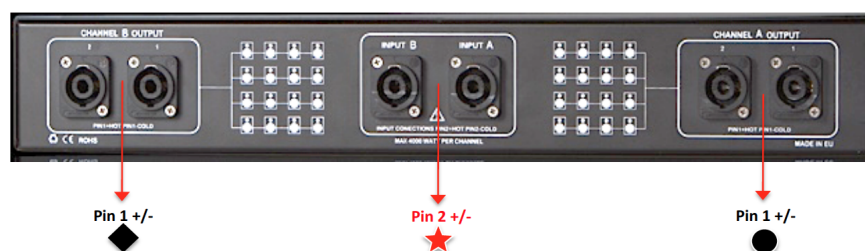

#### Input / Output NL4 SpeakON™ Connections

- ◆ Output B / Pin 1+, Pin 1- / Zone 1 & 2 (to Loudspeakers)
- ★ Input A,B / Pin +2, Pin 2- (from Amplifier)
- Output A / Pin 1+, Pin 1- / Zone 1 & 2 (to Loudspeakers)